

CB-40



100K Roof Available

agri.chiefind.com

Trusted. Tested. True.®


Model	Diameter	Eave Height	Peak Height	Eave Bushels	Peak Bushels	Peak M Ton	Peak Club M
CB40-15	123'-9" [37.72M]	53'-1" [16.17]	85'-7"	542,432	654,764	16,631	21,770
CB40-16	123'-9" [37.72M]	56'-7" [17.24]	89'-2" [27.18]	578,651	690,982	17,551	22,974
CB40-17	123'-9" [37.72M]	60'-2" [18.32]	92'-8" [28.24]	614,870	727,201	18,471	24,178
CB40-18	123'-9" [37.72M]	63'-8" [19.40]	96'-3" [29.34]	651,089	763,420	19,391	25,382
CB40-19	123'-9" [37.72M]	67'-3" [20.48]	99'-9" [30.40]	687,308	799,639	20,311	26,587
CB40-20	123'-9" [37.72M]	70'-9" [21.55]	103'-3" [31.47]	723,526	835,858	21,231	27,791
CB40-21	123'-9" [37.72M]	74'-4" [22.63]	106'-10"	759,745	872,077	22,151	28,995
CB40-22	123'-9" [37.72M]	77'-10" [23.71]	110'-4" [33.63]	795,964	908,295	23,071	30,199
CB40-23	123'-9" [37.72M]	81'-4" [24.79]	113'-11" [34.72]	832,183	944,514	23,991	31,404
CB40-24	123'-9" [37.72M]	84'-11" [25.86]	117'-5" [35.79]	868,402	980,733	24,911	32,608
CB40-25	123'-9" [37.72M]	88'-5" [26.94]	121'-0" [36.88]	904,621	1,016,952	25,831	33,812

NOTE: Metric ton capacity is based on a density of 56 lbs./bushel (721 kg/m3).

All capacities are based on a 6% compaction factor unless otherwise noted.

Chief's "W" stiffeners lead the competition in strength

Designed to support the vertical load, the "W" stiffener system provides additional strength, allowing sidewall height to exceed 100 feet (30.48 m). It also enables our bins to easily support overhead catwalks and conveyors.

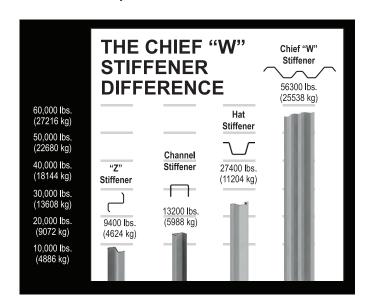

J-Rib Roof Design

Chief interlocking J-Rib roof is a structured design to meet your peak load requirements.

Roof panels that utilize a 2.5" (6.35 cm) interlocking J-Rib design provide reduced construction time while maintaining outstanding strength.

The structured J-Rib roof is available with upgrades up to 100,000 lbs. peak load.



CB-40

Wind and seismic upgrade available.

Designed for single pass sweep.

100k roof available.

Up to 1 million bushels.

Bolts and serrated nuts with a 1000 hour salt spray test coating include conical washer for complete sealing.



